

DS-KAB673-P
Peripheral Module

- Supports palm print and palm vein function
- Plug-and-play USB with no-driver technology, USB 2.0
- Supports linux system


▪ **Specification**

System	
Operating system	Linux
Image	
Resolution	1.3 MP
Capacity	
Palm print and palm vein capacity	10000
Authentication	
Palm print and palm vein recognition distance	5 cm ~12 cm
General	
Indicator	Support
Power supply	5V VDC, 1 A
Power consumption	5 W
Working temperature	-25 °C to 60 °C (-13 °F to 140 °F)
Working humidity	0 % to 90 % (no condensing)
Dimensions	110.5 mm × 72.05 mm × 43.08 mm (4.35" × 2.84" × 1.70")
Application environment	Indoor

▪ **Available Model**

DS-KAB673-P

▪ **Dimension**

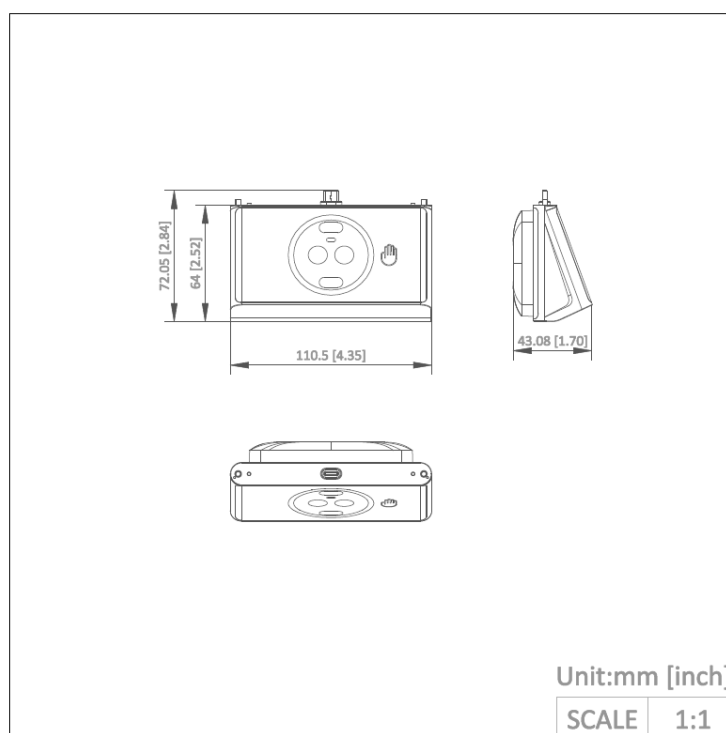

▪ Applicable Models



DS-K1T673TDX-BR



DS-K1T673TDGX



DS-K1T673DWX



DS-K1T673DWX-PRO



DS-K1T673TDWX-BR



DS-K1T673TDX



DS-K1T673TDWX-PRO



DS-K1T673TDWX



DS-K1T673DX-G1



DS-K1T673DX-BR



DS-K1T673DX

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq